


4-Ch. 600Ω Analog & Dry Contact IP Gateway

TC3846-6

- 1-4 Scalable Channels of Analog/ Dry Contact over IP
- 1 & 2 Ch. Units Field Expandable to 2 or 4 Channels
- 64Kbps/Channel (No Compression)
- Extremely Low Latency
- Temperature & Power Consumption Monitoring
- Extreme Temp (-40°C to +80°C) Optional
- Meets or Exceeds IEC 61850-3, IEEE 1613 & NEMA TS-2 Standards
- Member of JumboSwitch Product Family

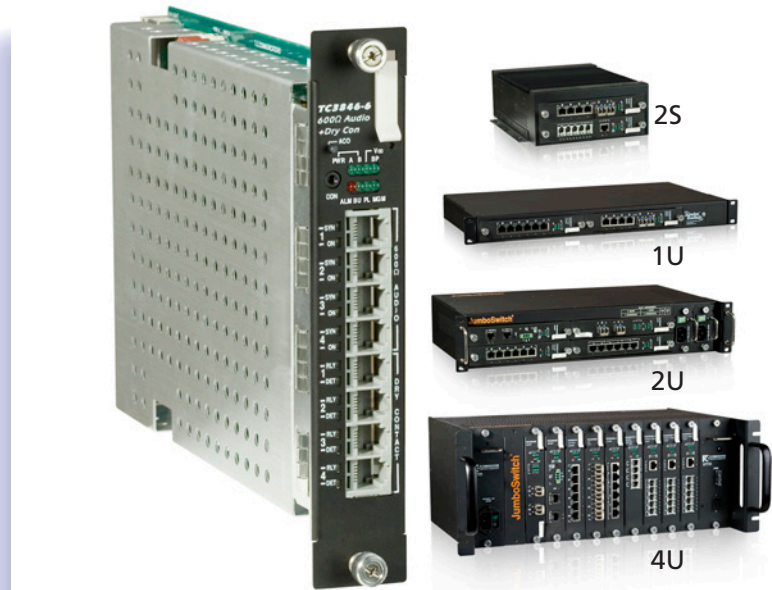

4-Ch. 600Ω Analog & Dry Contact IP Gateway

The TC3846-6 links or extends up to 4 channels of 600Ω 2/4 wire analog and dry contacts across layer 2/3 Ethernet networks. For cost savings and scalability, units can be ordered with only one or two channels of analog and dry contacts and later expanded in the field to 2 or 4 channels.

The TC3846-6 is easy to configure and supports point-to-point and point-to-multipoint topologies. It supports frequencies from 300Hz to 3.4KHz and achieves minimal end-to-end processing delay (latency) by using high performance buffering and forwarding technology. It can run continuous pilot tones without interruption or quality degradation. This is possible because of proprietary technology that, unlike VoIP, uses a common clock for both ends. The analog signals ride on a 64Kbps channel without compression.

VLAN and QoS for packet prioritization ensure reliable communications. Other key features include Traffic Monitoring and Statistics, Network Time Server (NTP Server), Remote Firmware Upgrade and Temperature and Power Consumption Monitoring. Diagnostics include LED indicators and local and remote loop back.

Setup, diagnostics, and management are accessed via Web, SNMP, Serial Console, and Telnet. An industrial hardened version (-40°C to +80°C) complies with all pertinent industry and environmental standards including IEC 61850-3, IEEE 1613 & NEMA TS-2.

The TC3846-6 fits any JumboSwitch® chassis option including 2S Standalone chassis and 1U/2U/4U card cages. Power supply options are 12VDC, 24VDC, -48VDC, 125VDC (available on 1U/2U/4U card cages only) or 115/230VAC.

Applications


Typical applications include linking or extending various 600Ω analog, audio and intercom devices, (e.g. Frequency Shift Keying [FSK] modems), E&M, teleprotection relay controllers, and dry contacts over Layer 2/3 IP networks.

It is also used to improve voice quality and increase system reliability in harsh environments, to replace unreliable leased phone circuits and to stabilize voice level settings for 600Ω audio channels.

Environmental & EMI Compliance

The JumboSwitch product family meets all pertinent industry-specific standards for environmental, performance and security requirements including IEC 61850-3, IEEE 1613, NEMA TS-2 and NERC CIP. Furthermore, future JumboSwitch family products will continue to be compliant with both existing and emerging industry standards and requirements, including developing Ethernet standards. Please refer to the charts below for specific standards compliance information.

	Tests	Industrial Standards	TC Communications - JumboSwitch Type Test and Levels	
			Power Supply Unit (PSU)	RJ-45 & Signal
Temperature/Humidity	Low Temperature Use	IEC 61850-3, IEEE 1613, NEMA TS-2	IEC 60068-2-1; Ae; -40°C; 16 hour	
	Low Temperature Storage	IEC 61850-3, IEEE 1613, NEMA TS-2		
	High Temperature Use	IEC 61850-3, IEEE 1613, NEMA TS-2	IEC 60068-2-2; Be; +80°C; 16 hour	
	High Temperature Storage	IEC 61850-3, IEEE 1613, NEMA TS-2	IEC 60068-2-2; Bd; +85°C; 16 hour	
	Damp Heat	IEC 61850-3, IEEE 1613, NEMA TS-2	IEC 60068-2-30; Db; +55°C; 95%; 96 hours	
Mechanical	Vibration	IEC 61850-3, IEEE 1613, NEMA TS-2	IEC 60068-2-6; Fc; 3 - 150 Hz; 7.5 mm; 2 g; 10 sweeps per axis	
	Shock	IEC 61850-3, IEEE 1613, NEMA TS-2	IEC 60068-2-27; Ea; 30g; 11ms	
ElectroMagnetic Compatibility	Electrostatic Discharge Immunity	IEEE 1613	IEC 61000-4-2; 8kV contact; 15 kV air	
	Radiated RF Immunity	IEC 61850-3, IEEE 1613	IEC 61000-4-3; 80 MHz - 1000 MHz; 20 V/m; AM 80% 1 kHz	
	EFT/Burst Immunity	IEC 61850-3, IEEE 1613	IEC 61000-4-4; 4 kV CM	IEC 61000-4-4; 4 kV CM
	Surge Immunity	IEC 61850-3	IEC 61000-4-5; 4 kV LG; 2 kV LL	IEC 61000-4-5; 4 kV LG; 2 kV LL
	Conducted RF immunity	IEC 61850-3	IEC 61000-4-6; 150 kHz - 80 MHz; 10 V; AM 80% 1 kHz	IEC 61000-4-6; 150 kHz - 80 MHz; 10 V; AM 80% 1 kHz
	Magnetic Field Immunity	IEC 61850-3	IEC 61000-4-8; 50 Hz; 100 A/m cont.; 1000 A/m 1 s	
	Damped Oscillatory Magnetic Field Immunity	IEC 61850-3	IEC 61000-4-10; 100 kHz; 30 A/m	
	Damped Oscillatory Magnetic Field Immunity	IEC 61850-3	IEC 61000-4-10; 1 MHz; 30 A/m	
Power Supply Unit (PSU) Variations	AC Voltage Dips	IEC 61850-3	IEC 61000-4-11; 30% & 100%, 0.5s	NA
	DC Voltage Dips	IEC 61850-3	IEC 61000-4-29; 40% & 70%, 0.1s	NA
	Damped Oscillatory Wave	IEC 61850-3	IEC 61000-4-12; 2.5 kV CM, 1.0 kV DM @1MHz	IEC 61000-4-12; 2.5 kV CM, 1.0 kV DM @ 1MHz
	Conducted PF CM Voltage	IEC 61850-3	IEC 61000-4-16; 50 Hz; 30 V cont.; 300 V 1s	IEC 61000-4-16; 50 Hz; 30 V cont.; 300 V 1s
	Conducted Emission	IEC 61850-3	CE/FCC/CISPR22 class A	CE/FCC/CISPR22 class A
	Conducted emission	IEC 61850-3	CE/FCC/CISPR22 class A	CE/FCC/CISPR22 class A
	Radiated emission	IEC 61850-3	CE/FCC/CISPR22 class A	
Dielectric	Dielectric 50 Hz Test	IEEE 1613	IEC 60255-5; 2 kV	IEC 60255-5; 0.5 kV
	Impulse Voltage Test	IEEE 1613	IEC60255-5; 5 kV	IEC 60255-5; 5 kV

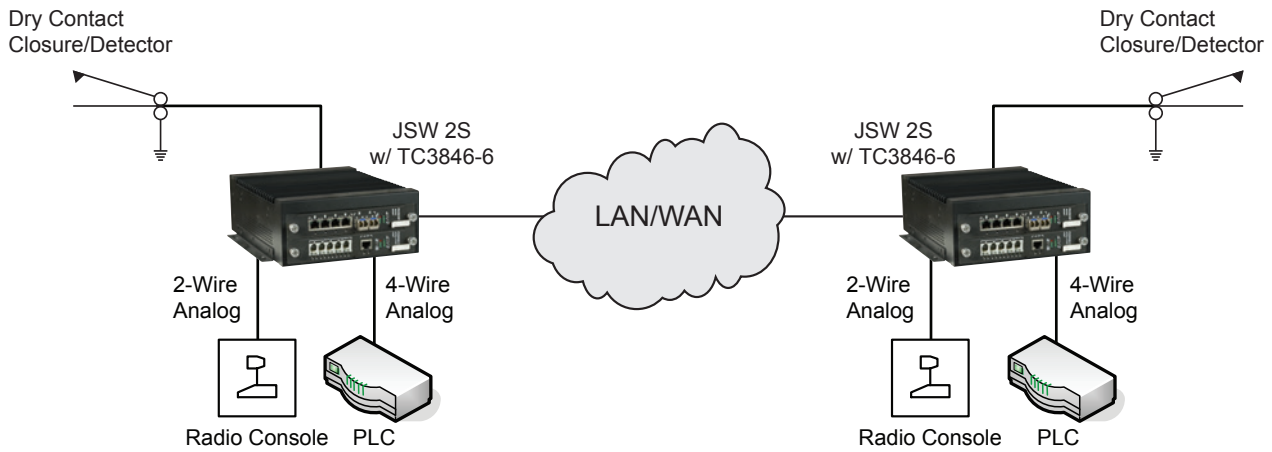

Typical Application using the JumboSwitch TC3846-6, 600Ω Analog & Dry Contact IP Gateway

Connection Capacity

- 600Ω (2/4 Wire).....1, 2, or 4 Ports
- Dry Contact.....1, 2, or 4 Ports
- Ethernet.....1 Port

Electrical

Dry Contact Interface

- Normal open.....standard
- Normal close.....optional
- Load Voltage (peak AC).....60V
- Load Voltage (DC).....60V
- Continuous load current.....0.55A
- Peak load current.....1.2A
- Max On Resistance.....2.5 Ω
- Output Capacitance.....150pF
- Detector Max input voltage.....9V

600Ω analog interface

- Impedance.....600Ω
- Max Input.....3Vp-p
- Frequency band.....300 to 3400Hz

Ethernet Interface

- Standards.....IEEE802.3, 802.3u, 802.1p&Q
- Connector.....RJ45
- ConsolePort.....2.5mmAudioJack

Regulatory Approval

- CE, FCC Part 15, CISPR (EN55022) CLASS A, IEC 61850-3, IEEE 1613, NEMA TS-2

System

- Bit Error Rate.....1 in 10¹⁰ or Better

Diagnostic Functions

- Local and Remote Loopback for Analog and Ethernet

LEDs

- Unit Status.....PWR (A, B), Alarm, BU
-PL, Vcc, BP, MGM
- Channel.....Status
- Ethernet.....Link/Act

Power

- Standard.....12VDC
- Optional.....24VDC, -48VDC
-or 125VDC (1U/2U/4U only)
-90-260 VAC, 50/60Hz
- Power Consumption.....<10W

Operating Temperature

- Bit Error Rate1 in 10¹⁰ or Better
- Standard Temp.....-20°C to 70°C
- Extreme Temp-40°C to 80°C

Storage

- Temperature.....-40°C to 90°C
- Humidity.....95% non-condensing

Physical (rack mount card)

- Height.....(3.15 cm) 1.24"
- Width.....(17.78 cm) 7.0"
- Depth.....(22.86 cm) 9.0"
- Weight.....(0.3kg) 0.75lbs



ISO 9001
QMI-SAI Global
#1045959

TC Communications, Inc.
17881 Cartwright Road
Irvine, CA 92614 U.S.A.
Factory Tel: (949) 852-1972
Fax: (949) 852-1948

Sales Office
U.S.A. Domestic International
(800) 569-4736 (949) 852-1973

Web Site: www.tccomm.com
E-mail: sales@tccomm.com

Note: Information contained in this data sheet is subject to change without prior notice.



www.JumboSwitch.com



DTS-38466-01-06
Rev. 081114