


Universal Rack Mount Card Cage

Models TCRM195/196

- 1U height (1.75")
- Dual Power Capability (Future Rel.)
- Universal Switching Power Supply Accepts 90 to 264VAC (47 to 63 Hz)
- Optional -48VDC Power Supply
- Overload & Short-Circuit Protection

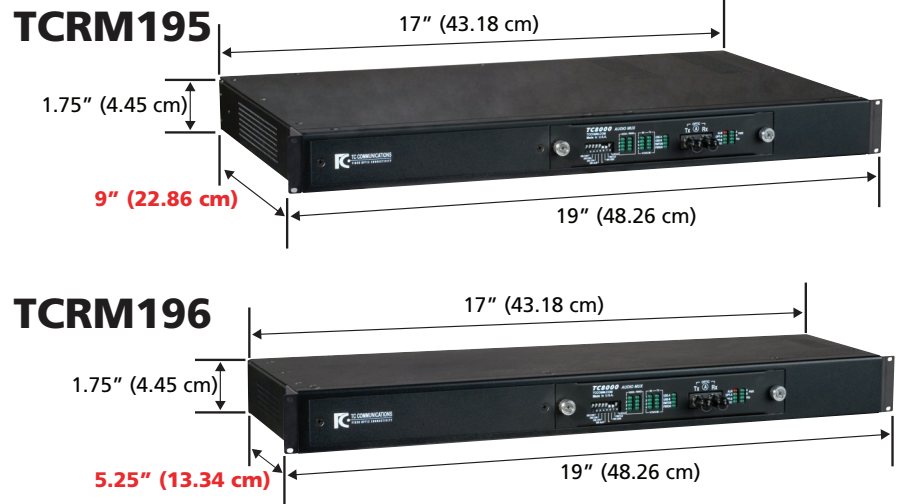

TCRM195/196 rack mount card cage (shown with optional built-in power supply)

The TCRM195 and TCRM196 Universal Rack Mount Card Cages hold up to two single multiplexer or modem-type cards, or one double-mux or double-modem type card. In general the TCRM195 is used for multiplexers and the TCRM196 for modems.

Both can operate with one power supply or dual load-sharing power supplies (built-in or external). The AC power supply automatically adjusts for 90 to 264VAC input and 47 to 63 Hz operation. The DC power supply accepts -48VDC input. The AC and DC power supplies can be mixed in the same unit.

The built-in power supply switch and its status LED are located on the front panel. Both rack assemblies are 19" wide by 1.75" high (1 U). The TCRM195 is 8.5" deep and the TCRM196 is 5.25" deep.



Applications

TC Card Cages are designed with sturdy construction to house TC products in standard 19" Racks.

TC Communications, Inc.
17881 Cartwright Rd. Irvine, CA 92614 U.S.A.
Tel: (949) 852-1972, Fax: (949) 852-1948
Sales: (800) 569-4736
Web Site: www.tccomm.com
E-mail: sales@tccomm.com